




The Manor, Tur Langton,  
Leicestershire LE8 0PJ  
Tel: 01858 545789 (supply only)  
Tel: 01858 545854 (supply &  
installation)  
Fax: 01858 545954  
[sales@sportsequip.co.uk](mailto:sales@sportsequip.co.uk)



### Surface Mounting:

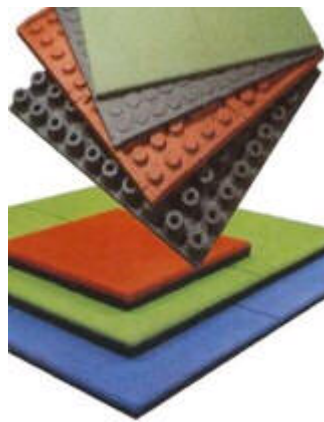

Where a good level sub base is already available the tiles can be laid onto the surface with perimeter tiles having ramped and corner edges to taper down the surface to the sub base.

### Flush Mounting:



All Playtiles are pressure moulded using a 1 part mix, the top surface on all the range from 20mm - 110mm thick is identical, having a smooth top surface with a 5mm x 45 degree chamfer around the perimeter and are visually divided into four using a 'V' chamfer across the centre - commonly known as cruciform.

All Playtiles are moulded with a shrinkage allowance and will measure over 1m.sq. Play tiles are also available in 500mm x 500mm in all thicknesses.

All Playtiles are moulded to a +/- 1mm thickness tolerance.

All Playtiles over 45mm thick have a unique design feature in a large round hollow cone foot formation, which gives greater strength, durability and improves the critical fall height.

The Head Impact Criteria (HIC) Compliant Play Tiles							
HIC	0.8	0.9	1.1	1.3	1.4	1.5	1.8
Thickness mm	25	30	35	40	45	50 <sup>EN</sup>	50
HIC	2.0	2.2	2.6	2.8	2.7	2.8	3.2
Thickness mm	55	60	70	75	80	90	105

Rubber compounds are not guaranteed against staining, it is possible that a carbon black release may occur as the tiles age and during hot spells on standard Compliant Play Tiles. We also offer alternative EPDM topped

Compliant Play Tiles in a variety of bright colours that do not suffer from this problem, and will not fade through wear.

Playtiles should never be laid when still warm as shrinkage may still occur.

***Safety tiles will not prevent an accident, but help to reduce the risk of serious injury in the event of a fall.***

A Trading Division of



© Boyd Sport & Play 20054